




## DIN 603 Coach Bolts / Carriage Bolts

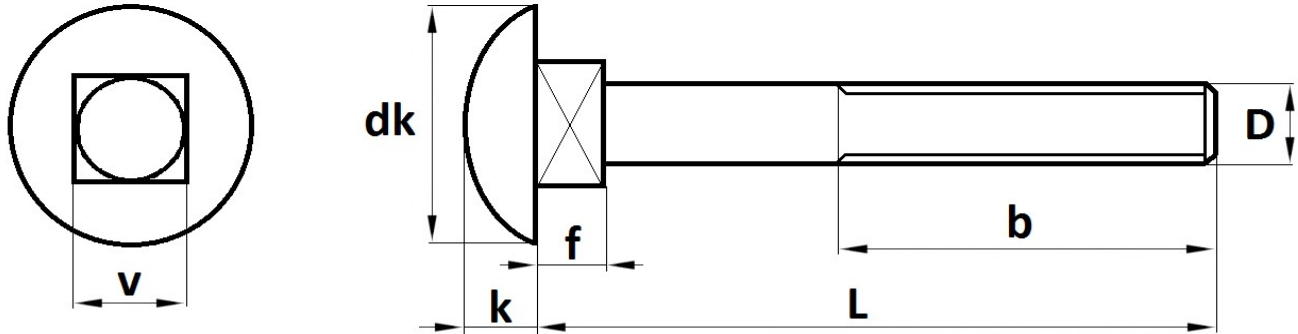

**Material:** Available in mild steel 4.6, high tensile steel 8.8, A2 stainless steel & A4 stainless steel

**Supplied with nuts:** No

**Standard:** DIN 603

**Second standard:** ISO 86677

### Coach Bolts / Carriage Bolts DIN 603 Specifications

All sizes listed below are in millimetres (mm)

D		M5	M6	M8	M10	M12	M16	M20
Pitch		.80	1.00	1.25	1.50	1.75	2.00	2.50
dk	max	13.55	16.55	20.65	24.65	30.65	38.80	46.80
	min	12.45	15.45	19.35	23.35	29.35	37.20	45.20
v	max	5.48	6.48	8.58	10.58	12.70	16.70	20.84
	min	4.52	5.52	7.42	9.42	11.30	15.30	19.16
f	max	4.10	4.60	5.60	6.60	8.75	12.90	15.90
	min	2.90	3.40	4.40	5.40	7.25	11.10	14.10
k	max	3.30	3.88	4.88	5.38	6.95	8.95	11.05
	min	2.70	3.12	4.12	4.62	6.05	8.05	9.95
b	Not specified by DIN 603 - please call us if you have any specific requirements							

[www.tcfixings.co.uk/coach-bolts](http://www.tcfixings.co.uk/coach-bolts)

Tel: 01799 520640

This PDF is copyright by TC Fixings Ltd