


DRYWALL SCREWS - COARSE THREAD




Product Information

- For fixing dry lining to timber section.

Key Features

- 25° 'Super Sharp' (SS) point for ease of penetration
- The single deep coarse thread gives an excellent fixing into timber section.
- Bugle head reduces likelihood of damaging the paper surface
- Surface hardened up to 750 HV to prevent torque shearing under load and a core hardness of up to 450 HV for improved ductility
- Fully threaded up to 50mm, partially threaded thereafter
- Plated in either yellow or black phosphate to withstand 50 hours salt spray test
- Made from C10-18 Steel

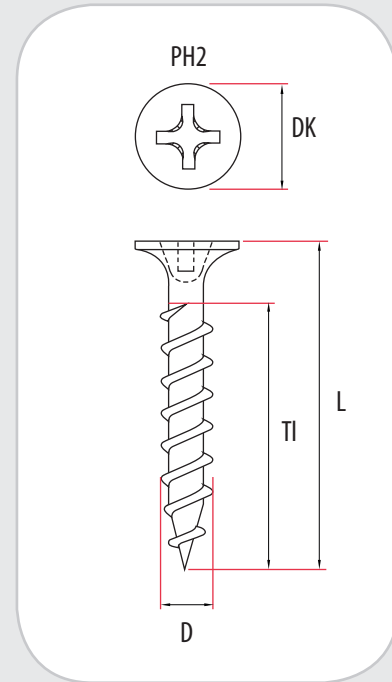

Phillips Bugle Head - Coarse Thread (Black)

| TIMco Code | Size Ø x Length (mm) | Driver Bit Size | DK (mm) | TI (mm) | L (mm) | D (mm) |
|------------|----------------------|-----------------|---------|---------|--------|--------|
| 00025DRYC | 3.5 x 25 | PH2 | 8.25 | 19.5 | 25.0 | 3.50 |
| 00032DRYC | 3.5 x 32 | | 8.25 | 26.5 | 32.0 | 3.50 |
| 00035DRYC | 3.5 x 35 | | 8.25 | 29.5 | 35.0 | 3.50 |
| 00038DRYC | 3.5 x 38 | | 8.25 | 32.5 | 38.0 | 3.50 |
| 00042DRYC | 3.5 x 42 | | 8.25 | 26.5 | 42.0 | 3.50 |
| 00050DRYC | 3.5 x 50 | | 8.25 | 44.5 | 50.0 | 3.50 |
| 00065DRYC | 4.2 x 65 | | 8.25 | 61.5 | 65.0 | 4.20 |
| 00075DRYC | 4.2 x 75 | | 8.25 | 61.5 | 75.0 | 4.20 |
| 00100DRYC | 4.8 x 100 | | 8.75 | 61.5 | 100.0 | 4.80 |

Phillips Bugle Head - Coarse Thread (Yellow)

| TIMco Code | Size Ø x Length (mm) | Driver Bit Size | DK (mm) | TI (mm) | L (mm) | D (mm) |
|------------|----------------------|-----------------|---------|---------|--------|--------|
| 00125DRYCY | 4.8 x 125 | PH2 | 8.25 | 19.5 | 25.0 | 4.80 |
| 00150DRYCY | 4.8 x 150 | | 8.25 | 26.5 | 32.0 | 4.80 |

*all figures stated are approximate and for reference only.